

FS-DU SERIES

OUTDOOR LED DISPLAY



QUICK
INSTALLATION




3.7KG ULTRA-LIGHT
MODULE



MODULAR
DESIGN



7680HZ HIGH
BRUSH DISPLAY

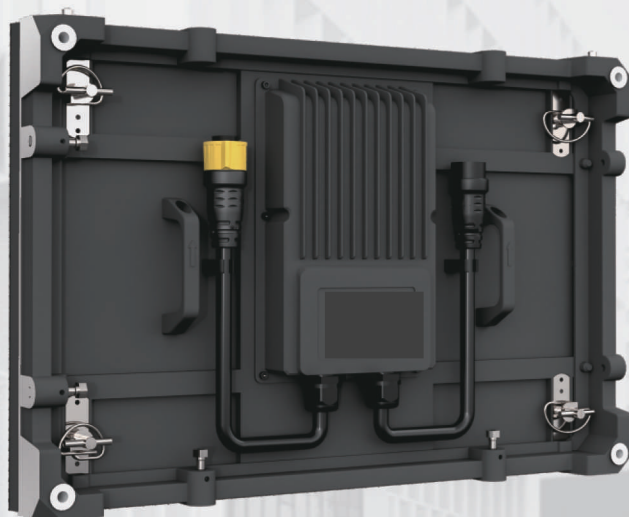

High Brightness And Energy Saving
Flexible Installation
Ultimate Picture Quality




FS-DU SERIES

Product Features

Lightweight, high-brightness display designed for outdoor scenes

01

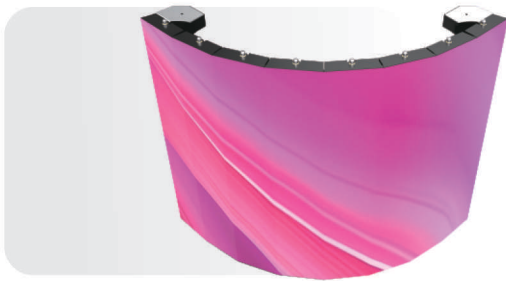


Modular Design

Module integrated design, say goodbye to complex structure, ready to use, reduce weight and maintain strength.




Lightweight Structure

Single module weighs only **3.7KG**, one person can easily operate, saving handling and transportation costs.

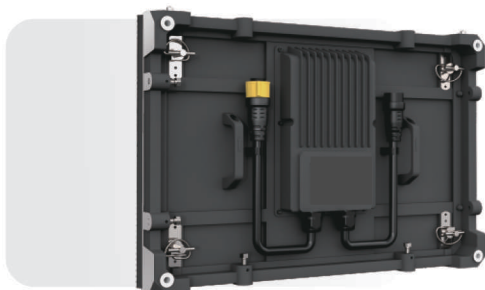


Dual Maintenance Design

Front and rear two-way maintenance, the module is fixed with only four elastic locks, simple operation, easy to get Started.

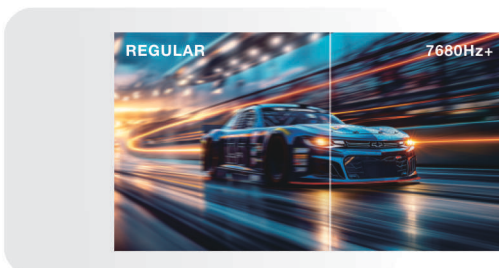


Ultra-detailed Picture

High refresh rate **7680Hz+**; high gray scale **16bit**; high contrast ratio **5000:1**, perfect reproduction of the picture texture.

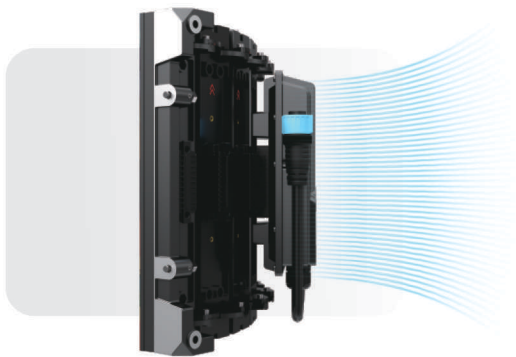

Strong Heat Dissipation Operation

Ip65 high protection, segmented heat dissipation rib design, efficient heat dissipation, 24h stable operation, no fear of harsh environments.

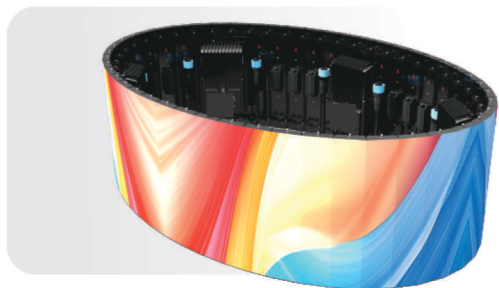

Creative Assembly

flexible assembly design: internal and external arc installation, single box 90 ° rotation, the minimum bending radius of 306 mm, with FS-FU products, flexible construction of corner, column and other shaped display.

Product Advantages

Easy to install, easy to maintain, worry-free use

02

Convenient Maintenance

A variety of installation methods. Module front maintenance, modular design, easy to replace, quick replacement on site.



Convenient Installation

Built-in integrated signaling, dual power input, aviation plug to plug design, goodbye to cumbersome installation, quickly put into use.



Fearless Restrictions

Die-casting frame, easy to install, wall mounting restrictions, flexible to deal with a variety of installation scenarios.



Product Specification


03

Module Specifications			
Product Model	FS03-DU	FS05-DU	FS06-DU
Module Dimensions(mm)	480x320x60		
Module Resolution(pixels)	123x82	84x56	72x48
Cabinet Specifications			
LED Type	SMD1921	SMD2727	
LED Board Flash	Optional		
Certificates & Reports	ETL/CE(Pending)		
Power Supply Method	Split Power Supply		
Main Structure Material	Aluminum Profile + Plastic / Die-cast Aluminum		
Weight(kg/cabinet)	3.7KG		
Maintenance Method	Front/Rear Maintenance		
Max Power Consumption / Avg. Power Consumption (W/m²)	650/220		
Brightness(nit)	5000		
IP Rating	Ip65		

Parameters vary by configuration and are for reference only.



OUTDOOR ADVERTISING

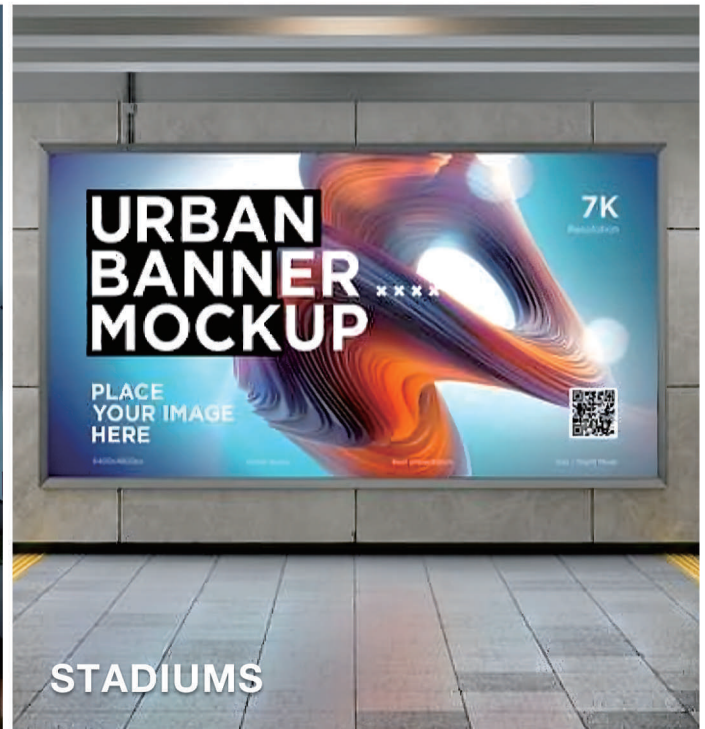

STADIUMS



STAGE RENTALS



BUILDING CURTAIN WALLS



19 years
Professional LED
Display Manufacturer



200,000 m²
annual production capacity



400+
Patents Owned



10,000+
International & Domestic
Projects



100+
Sales Reps Globally

Professional LED Manufacturer, Your Loyal Partner
Shenzhen / Huizhou / America / Netherlands