

RP

2-IN-1

PREMIUM RENTAL
LED DISPLAY





2-in-1
LED



7680Hz
REFRESH RATE




Camera-Ready

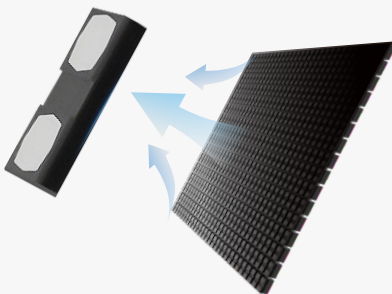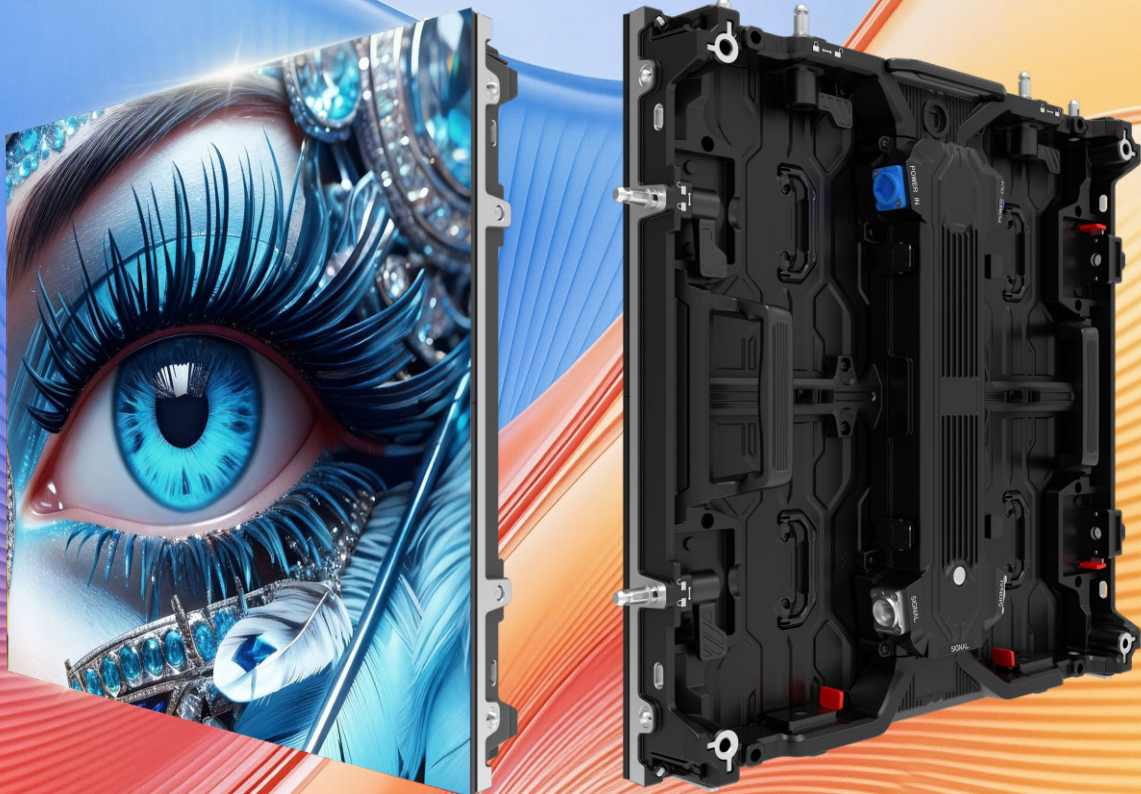

- Industry-leading high-thrust 2-in-1 lamp, thrust increased by 400%

Comparison of Thrust Bearing Capacity

13kg (RP) VS 3kg (Traditional)

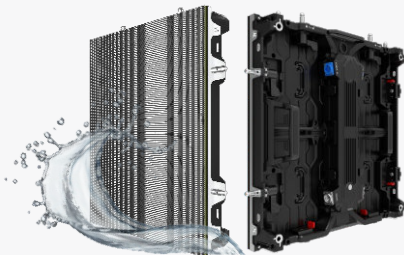


- High-level protection

- 1.High waterproof rating (GOB)
- 2.Four-corner soft rubber protection
- 3.Module corner protection
- 4.Base pads



- Two in one, performance done

- Camera-Ready
- Flicker-Free
- Moiré-Free
- Higher Brightness
- Non-reflective

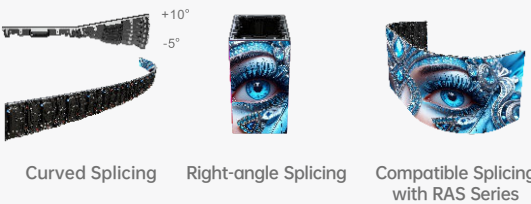

- Flexible splicing for greater freedom

The cabinet is equipped with a curved lock, enabling assembly at an angle ranging from -5° to +10°, which allows adaptation to more installation environments.

PRODUCT PARAMETERS				
Product Model	RP1.9	RP2.6 / RP2.6-P	RPW2.9 / RPW2.9-P	RPW3.9 / RPW3.9-P
Pixel Pitch (mm)	1.95	2.6	2.97	3.91
Module Dimensions(mm)	500x250x15.7		500x250x15.9	
LED type	SMD1212 2 in 1	SMD1515 2 in 1	SMD1415	SMD1921
Module Resolution(pixels)	256x128	192x96	168x84	128x64
Cabinet Dimensions(mm)	500x500x73.5	500x500x73.5 500x1000x73.5	500x500x73.5/500x1000x73.5	
Cabinet Resolution(pixels)	256x256	192x192/192x384	168x168/168x336	128x128/128x256
Weight (kg)	7.5	7.5/12	7.3/12	7.5/12.5
Max WB Brightness(nits)	1000		4000	5000
Gray Level (bit)	14-16			
Contrast	≥3000:1		≥4000:1	≥3500:1
Refresh Frequency (Hz)	≥7680			
Protection Level (F/ B)	IP30/IP30		IP65/IP54	
Maintenance Methods	Front and rear maintenance			

*Note:Parameters may vary depending on configuration and are for reference only.